

WELLS

WELL-VOID

CIVIL ENGINEERING CONSTRUCTION

Type FR/4C Specification

- Galvanised mild steel to BS2989
- Supplied cut to length
- Plastic caps supplied and fitted (if required)
- Grout saddles supplied and fitted (if required)
- Bulk delivery
- No order to small
- Rapid delivery service



Call 01535 664231

Well-Void Type FR/4c Corrugated sheathing


Material: Galvanised Mld Steel to BS2989 (1982)
Mild steel to BS1449 (1) (1983)

Diameters: Nominal + 2mm - 0mm

The continuous curve indicates recommended dimensions for normal applications.

The diagram shows the test pipes rigidity. For special fields of application tensions must also be checked.

Radial rigidity

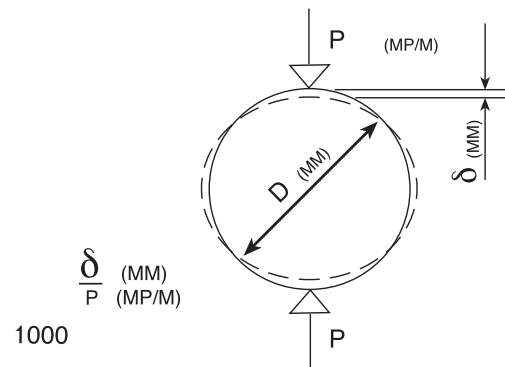

Nom Dia (mm)	ID	0.5mm kg/M	0.4mm kg/m	Plastic end plugs
41	41.0	0.70	N/A	0.20
46	45.5	0.74	0.60	0.30
51	50.0	0.80	0.64	0.40
56	54.5	0.85	0.68	0.50
58	59.0	0.94	0.75	0.60
61	61.5	1.02	0.82	0.60
66	66.0	1.05	0.84	0.65
71	70.5	1.12	0.90	0.70
76	75.0	1.19	0.96	0.75
81	79.5	1.29	1.03	0.80
86	84.0	1.30	1.04	0.85
88	88.5	1.39	1.11	0.90
91	91.0	1.44	1.15	0.90
96	95.5	1.48	1.18	1.00
101	100.0	1.57	1.26	1.20
103	104.5	1.64	1.31	1.25
110	109.0	1.67	1.33	1.30
1.30	130.0	1.85	N/A	1.60

NB:- FR/1c available from 100 dia and larger (0.5mm)

FR 0.5		0.02
--------	--	------



Prospect Works · Airedale Road · Keighley · West Yorkshire · BD21 4LW
Tel: 01535 664231 · Fax: 01535 664235 · www.wells-spiral.co.uk · sales@wells-spiral.co.uk